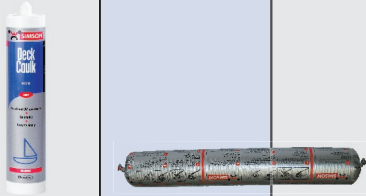

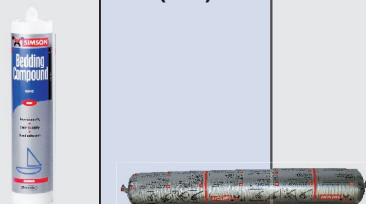





MSR Marine Special Range					
Part No.	Name	Colour/s	Size/s	Used For	Comments
SDCCS. 	Deck Caulking (DC)	Black	290ml cartridge 600ml sausage	For seams in teak decks, MarineDeck 2000 seams	<ul style="list-style-type: none"> <li>Flows well from gun but has very little slump factor so one of the best products on the market to use</li> <li>Very flexible product</li> <li>Must have bond breaker tape under it for warranty</li> <li>Cure product can go soft if teak cleaners are applied</li> <li>Seam sizes are important - see tech sheet</li> <li>Sanding time faster than most other products on market but depend on temp and seam size</li> </ul>
SCACS 	Construction Adhesive (CA)	Black Grey White	290ml cartridge	High Strength bonding, General purpose sealing, Window glazing, Below waterline sealing, Hull seams on planked boats (with caution), Bonding of teak decks (plank at a time)	<ul style="list-style-type: none"> <li>Now only imported into NZ in SKF form</li> <li>Thicker product so stands up better in vertical or overhead appl.</li> <li>Not as easy to spread as BC or DC</li> <li>Has reasonable flexibility</li> <li>Very high strength bond so fitting can be hard to remove</li> </ul>
SBCCS 	Bedding Compound (BC)	L Grey	290ml cartridge 600ml sausage	Sheet Bonding MarineDeck 2000 bonding Panel bonding	<ul style="list-style-type: none"> <li>Very thixotropic product so easy to spread</li> <li>Longer opening times</li> <li>A lot slower curing so longer cramp time if required</li> <li>Is a moisture cure so large panels will need to pull moisture</li> <li>from some where (will come through Primer P if timber surface)</li> <li>Very light grey in colour, white is no longer imported into NZ</li> </ul>
SFTCS 	Fast Tack (FC)	White	290ml cartridge	Glazing Bonding where green strength is required	<ul style="list-style-type: none"> <li>Has very short open time in NZ</li> <li>Look to ISR70-04 or ISR 70-08 if this type of product is required</li> </ul>
P Primer Range					
SPPS 	Primer P (PP)	Clear	500 ml	Pre-treatment of Porous substrates i.e.: timber, concrete	<ul style="list-style-type: none"> <li>Must be dry before product is applied (approx 1 hr) but don't leave open (before applying product) for too long (5 hr)</li> <li>Especially important that this is used for Teak Deck seaming</li> </ul>
SPMS	Primer M (PM)	Clear	250 ml	Pre-treatment of harder substrates i.e.: metals, GRP, epoxy, 2 pot paints	<ul style="list-style-type: none"> <li>Must be dry before product is applied (approx 5 to 10 minutes) but don't leave open (before applying product) for too long (5 hr)</li> <li>This is better than a solvent wash as it assists with bond</li> </ul>
SPGS 	Primer G (PG)	Black	250 ml	Black out primer for glazing	<ul style="list-style-type: none"> <li>Use to stop UV from breaking down the bonding joint</li> <li>For glass a ceramic band is much better but needs to be ordered when glass is toughened (this is up to customer)</li> <li>Joint will fail if no black out, ceramic band or if joint is cover from UV</li> </ul>

<b>ISR Industrial Special Range</b>					
<b>Part No.</b>	<b>Name</b>	<b>Colour/s</b>	<b>Size/s</b>	<b>Used For</b>	<b>Comments</b>
S7001CS	70-01	Black White Grey	290ml cartridge  600ml sausage	General pupose sealing  Where a flexible joint is required	<ul style="list-style-type: none"> <li>Easier to remove fitting latter than if CA was used</li> <li>DO NOT use this product on laminated glass</li> </ul>
S7003CS	70-03	Black Grey White	290ml cartridge  600ml sausage	Bonding & Adhesion	<ul style="list-style-type: none"> <li>This is a straight replacement for Construction Adhesive other than it is faster open time</li> <li>Use CA where you can as this is the Marine Range product</li> </ul>
S7004CS	70-04	Black	290ml cartridge  600ml sausage	Glazing  Bonding  where a shorter cramp time is required	<ul style="list-style-type: none"> <li>Designed for glazing and has a high green strength</li> <li>Construction Adhesive is an alternative if longer open time required</li> </ul>
S7005CS	70-05	Grey White	600ml sausage	High Strength Bonding Low flexibility application Below waterline sealing	<ul style="list-style-type: none"> <li>Have not used this product so hard to comment</li> <li>Wouldn't use it unless requested or low flex is required</li> </ul>
S7008CS	70-08	Black	290ml cartridge  600ml sausage	Glazing	<ul style="list-style-type: none"> <li>Shorter open time but very high green strength</li> <li>Use for glazing where boat is likely to be used 1 or 2 days later</li> <li>Don't push into marine unless requested or above comment</li> </ul>
S7010CS	70-10	Clear (transparent)	290ml cartridge	Where clear joint is required	<ul style="list-style-type: none"> <li>Note that this product will not be imported any more (low demand) this could change if interest in the future changed</li> <li>Doesn't have the same bonding strength as the other adhesion products but still better than silicone</li> <li>When current stock holding run out that's it for now</li> </ul>
<b>S Solvent Range</b>					
SCES	Cleaner E	Clear	500 ml  1 LT	High Strength Cleaner Surface Preparation Tool cleaning Degreasing of teak etc	<ul style="list-style-type: none"> <li>Similar to acetone but better</li> <li>Be careful as will remove some paints and melt plastics especial arylic windows</li> <li>If in doubt do a test area first</li> </ul>
SISOPS	Isopropyl Alcohol	Clear	500 ml 250 ml 1 LT 4 LT	Lower Strength Cleaner Surface Preparation Tool cleaning	<ul style="list-style-type: none"> <li>Normal used for surface prep in glazing should be OK on most arcylics - BUT TEST FIRST</li> </ul>
B#4-SOLS	Solvent No.4	Clear	500 ml 250 ml	High Strength Cleaner Plastic fusion	<ul style="list-style-type: none"> <li>We use this for melting plastic crystals onto So-Pac Hatch hinges</li> </ul>